Marlin WATER SUCTION & DISCHARGE

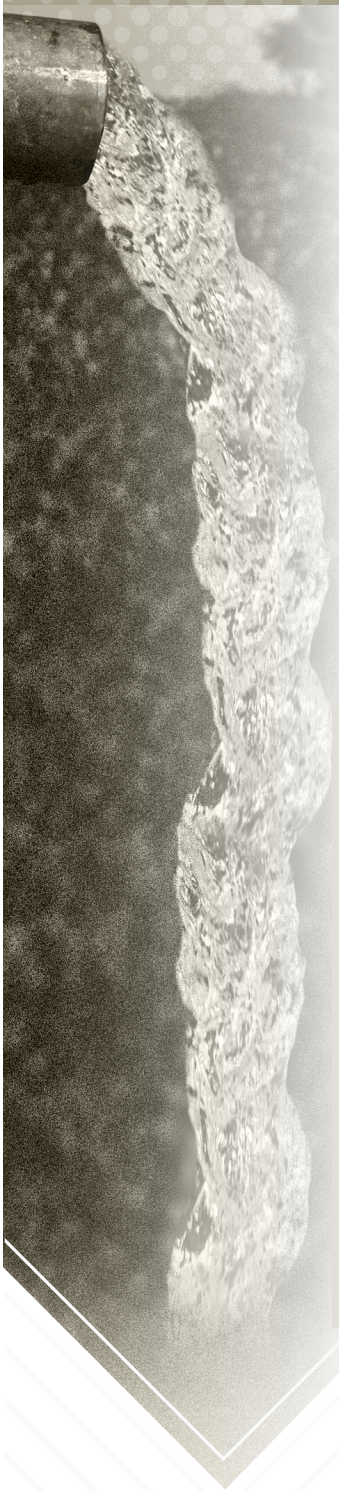

Mandrel built, heavy duty suction and discharge hose for handling of water, inert fluid, sewage and waste water, where optimum flexibility is required.

- **CORE:** *Black. Synthetic rubber resistant to water*
- **REINFORCEMENT:** *Plies of synthetic cords with helix wire*
- **COVER:** *Black. Synthetic rubber, wrapped type, abrasion water resistant*
- **TEMPERATURE:** *-13°F to +158°F (Continuous)*
- **LAYLINE:** *MARLIN POWER TRACK / GENERAL PURPOSE-SD 150 PSI*
- **SAFETY FACTOR:** *4:1*

Part Number	I.D. *(inch)*	O.D. *(inch)*	Working Pressure *(PSI)*	Vacuum *(in/HG)*	Standard Length *(feet)*	Bend Radius *(inch)*	Lbs./Ft.
AH-1.5-WSD	1-1/2"	1.89"	150 PSI	29 in/HG	100'	10"	0.74 Lbs/Ft
AH-2-WSD	2"	2.44"	150 PSI	29 in/HG	100'	12"	1 Lbs/Ft
AH-3-WSD	3"	3.46"	150 PSI	29 in/HG	100'	20"	1.61 Lbs/Ft
AH-4-WSD	4"	4.57"	150 PSI	29 in/HG	100'	28"	2.21 Lbs/Ft
AH-6-WSD	6"	6.73"	150 PSI	29 in/HG	100'	47"	4.5 Lbs/Ft
AH-8-WSD-20FT	8"	8.78"	150 PSI	29 in/HG	20'	63"	7.52 Lbs/Ft
AH-10-WSD-20FT	10"	10.93"	150 PSI	29 in/HG	20'	79"	12.47 Lbs/Ft
AH-12-WSD-20FT	12"	13.14"	150 PSI	29 in/HG	20'	108"	18.6 Lbs/Ft