




PYTHON Composite Hose

PowerTrack Python is recommended for use in delivery and/or suction of fuels, oils and lubricants in cistern trucks, railcars or fixed deposits. — complies with USCG 33CFR 154.500



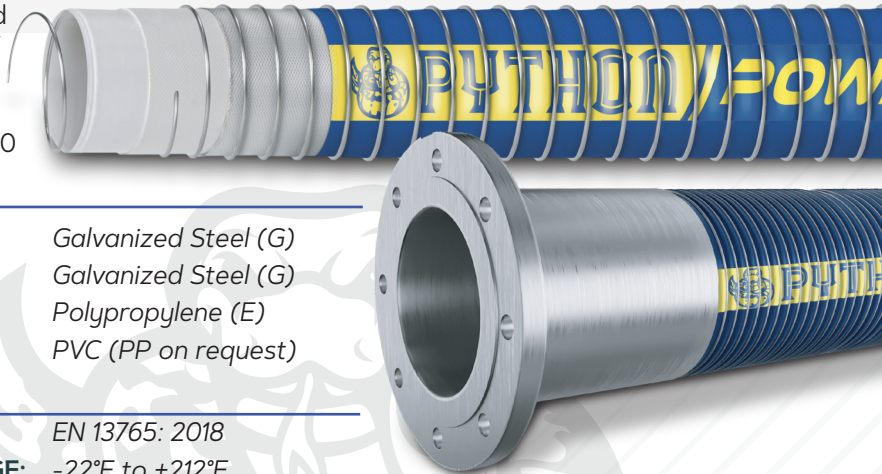





CONSTRUCTION

- ▶ **INNER WIRE SPIRAL:** Galvanized Steel (G)
- ▶ **OUTER WIRE SPIRAL:** Galvanized Steel (G)
- ▶ **INNER LINING:** Polypropylene (E)
- ▶ **COVER:** PVC (PP on request)

FEATURES

- ▶ **NORMS:** EN 13765: 2018
- ▶ **TEMPERATURE RANGE:** -22°F to +212°F.
- ▶ **SAFETY FACTOR:** 4:1
- ▶ **VACUUM:** 13 PSI
- ▶ **LENGTH COILS:** 98 Ft. Other under request.
- ▶ **ENDS:** Galvanized Steel 150lb Fixed x Floating or Victaulic. ANSI 150 LB RF (raised face) fixed by floating flange

Part Number	 I.D. (inch)	 O.D. (inch)	 Working Pressure (PSI)	 Burst Pressure (PSI)	 Bend Radius (inch)	 Lbs./Ft.
PA-6-PYTHON-FIX-FLOAT-10FT	6"	7.36"	250 PSI	1,000 PSI	19.56"	8.0 Lbs/Ft
PA-6-PYTHON-FIX-FLOAT-20FT	6"	7.36"	250 PSI	1,000 PSI	19.56"	8.0 Lbs/Ft
PA-8-PYTHON-FIX-FLOAT-10FT	8"	9.09"	250 PSI	1,000 PSI	29.13"	14.44 Lbs/Ft
PA-8-PYTHON-FIX-FLOAT-20FT	8"	9.09"	250 PSI	1,000 PSI	29.13"	14.44 Lbs/Ft
PA-10-PYTHON-FIX-FLOAT-10FT	10"	11.37"	250 PSI	1,000 PSI	36.22"	16.79 Lbs/Ft
PA-10-PYTHON-FIX-FLOAT-20FT	10"	11.37"	250 PSI	1,000 PSI	36.22"	16.79 Lbs/Ft
PA-12-PYTHON-FIX-FLOAT-10FT	12"	13.46"	200 PSI	800 PSI	45.27"	18.81 Lbs/Ft
PA-12-PYTHON-FIX-FLOAT-20FT	12"	13.46"	200 PSI	800 PSI	45.27"	18.81 Lbs/Ft
PA-10-PYTHON-VIC-VIC-10FT	10"	11.37"	250 PSI	1,000 PSI	36.22"	16.79 Lbs/Ft
PA-10-PYTHON-VIC-VIC-20FT	10"	11.37"	250 PSI	1,000 PSI	36.22"	16.79 Lbs/Ft
PA-12-PYTHON-VIC-VIC-10FT	12"	13.46"	200 PSI	800 PSI	45.27"	18.81 Lbs/Ft
PA-12-PYTHON-VIC-VIC-20FT	12"	13.46"	200 PSI	800 PSI	45.27"	18.81 Lbs/Ft