









Sandstorm DRYBULK HOSE

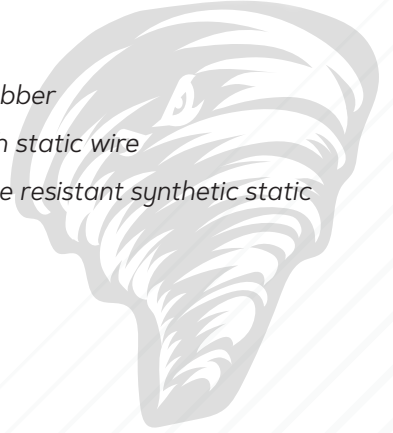

Sandstorm is designed for the transfer of dry materials & slurries and ideal for dry cement, pebble, lime, and other abrasive materials

| | |
|----------------------|---|
| TUBE | <i>Black high abrasion resistant rubber</i> |
| REINFORCEMENT | <i>Spiral-plyed synthetic fabric with static wire</i> |
| COVER | <i>Black abrasion, weather & ozone resistant synthetic static conductive material</i> |
| TEMPERATURE | <i>-20°F to +176°F</i> |
| SAFETY FACTOR | <i>4:1</i> |
| ABRASION LOSS | <i>130-150 mm³ (DIN 53516)</i> |



| Part Number |  I.D. (inch) |  O.D. (inch) |  Tube Thickness (inch) |  Working Pressure (PSI) |  Standard Length (feet) |  Bend Radius (inch) |  Lbs./Ft. |
|-------------------|---|---|---|--|--|--|--|
| AH-4-DRYBULK-3/16 | 4" | 4.8" | 3/16" | 75 PSI | 100' | 39" | 2.73 Lbs/Ft |
| AH-4-DRYBULK-1/4 | 4" | 4.9" | 1/4" | 125 PSI | 100' | 39" | 3.10 Lbs/Ft |
| AH-5-DRYBULK-3/16 | 5" | 5.79" | 3/16" | 75 PSI | 100' | 49" | 3.34 Lbs/Ft |
| AH-5-DRYBULK-1/4 | 5" | 5.88" | 1/4" | 125 PSI | 100' | 49" | 3.79 Lbs/Ft |



**Ductile Iron
Camlocks
AVAILABLE**

POWERTRACK USA

nationalsales@powertrackhose.com