



Stainless Steel Metal Hose

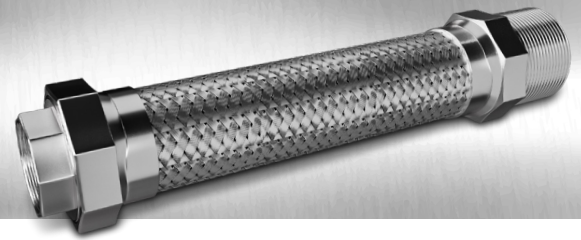

Austin Hose offers a Stainless Steel Braided Hose that is a durable and versatile solution for multiple applications. It features a flexible stainless annular core reinforced with double layers of stainless steel braiding, providing strength and higher-pressure ratings, while at the same time still providing extreme flexibility.

This hose is widely used in industries like oil rigs, gas plants, chemical processing, and terminal offloading, thanks to its ability to handle demanding environments and its corrosion resistance. Multiple end configurations available, from male pipe to flanges as well as hammer unions, just let us know what you need.





- **CORE:** 316 Corrugated Stainless Steel
- **REINFORCEMENT:** 304 Stainless Steel Double Braid
- **ENDS:** Custom End Configurations Available

► **TEMPERATURE:** -450°F to +1200°F

Part Number	I.D. (inch)	O.D. (inch)	Working Pressure (PSI) @ 70°F	Burst Pressure (PSI) @ 70°F	Bend Radius (inch)		Lbs./Ft.
					dynamic	static	
PA-3/4-SS-MP-25FT	3/4"	1.11"	870 PSI	3480 PSI	6.22"	2.76"	0.47 lbs/ft
PA-3/4-SS-MP-50FT	3/4"	1.11"	870 PSI	3480 PSI	6.22"	2.76"	0.47 lbs/ft
PA-2-SS-32MP-25FT	2"	2.46"	464 PSI	1856 PSI	10.75"	6.30"	1.43 lbs/ft

- **CORE:** 316 Corrugated Stainless Steel
- **REINFORCEMENT:** 304 Stainless Steel Single Braid
- **ENDS:** Custom End Configurations Available
- **TEMPERATURE:** -450°F to +1200°F

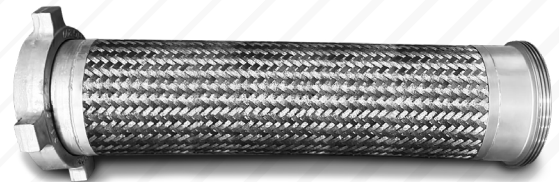

Part Number	I.D. (inch)	O.D. (inch)	Working Pressure (PSI) @ 70°F	Burst Pressure (PSI) @ 70°F	Weight Per Assembly
PA-10-SS-FIG200-48IN	10"	11.56"	108 PSI	163 PSI	146 lbs
PA-10-SS-FIG200-60IN	10"	11.56"	108 PSI	163 PSI	182 lbs

POWERTRACK

nationalsales@powertrackhose.com